

TWISTED ROPE ANCHORAGE LINE

REF: IS-TRK-14

(10 TO 200 MTR)

A strong and durable twisted rope lifeline designed for horizontal use as a temporary anchorage line. Provides mobility with safety for work at height applications.



FEATURES

- ✓ One end with Karabiner (IS-1102) & other end with Snap Hook (IS-1001)
- ✓ Made of 14mm dia 3-strand Twisted Rope
- ✓ High strength and abrasion resistant
- ✓ Lightweight, flexible and easy to handle
- ✓ Ideal for use as temporary horizontal anchorage line
- ✓ Available in lengths 10 Mtr to 200 Mtr



TECHNICAL SPECIFICATIONS

Rope Type	3-Strand Twisted Rope
Material (Rope)	Polyester
Diameter	14 mm $\pm$ 1 mm
Breaking Strength (Rope)	25 kN
Construction	Twisted Rope with factory spliced eye loop at both ends
Karabiner (IS-1102)	Material : Alloy Steel Finish : Silver / Golden Yellow Galvanized Minimum Strength : 22 kN
Snap Hook (IS-1001)	Material : Alloy Steel Finish : Silver / Golden Yellow Galvanized Minimum Strength : 22 kN
Length	10 Mtr to 200 Mtr (Custom lengths available on request)
Conformance	EN 360:2002 ANSI / Z359.14



MADE IN
INDIA


ONE END WITH
KARABINER

(IS-1102)

OTHER END WITH
SNAP HOOK

(IS-1001)

PRODUCT OVERVIEW

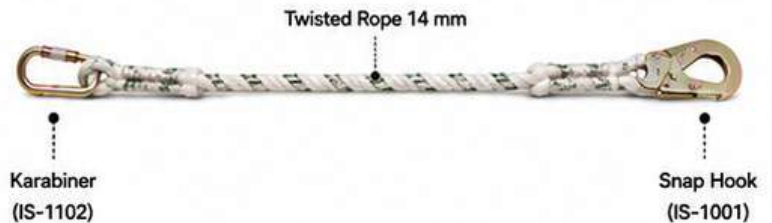

APPLICATIONS & INDUSTRIES



Steep Roof



Electricity



Window Washing



Building
Material



Climbing



Gutter
Cleaning



Utility
Machinery



General Work
at Height



HIGH STRENGTH

Rope breaking strength 25 kN ensures reliable performance.



DURABLE & RELIABLE

Polyester rope with high abrasion and UV resistance.



LIGHTWEIGHT

Easy to carry, install and use for extended operations.



EASY TO USE

Comes with karabiner and snap hook for quick connection.



COMPLIANT & SAFE

Complies with EN 360:2002 and ANSI / Z359.14 for horizontal lifeline use.

