TECHNICAL DATA SHEET

FALL PROTECTION EQUIPMENTS

Retractable Block with Retrieval system

Ref: IS-RFA-25R to IS-RFA-30R

Robust, light weight and Durable Polymer, casing made from high impact strength nylon. Has a Swivel Anchorage eye at one end: and a Swivel Steel Snap Hook SF-1404 at the retractable end.

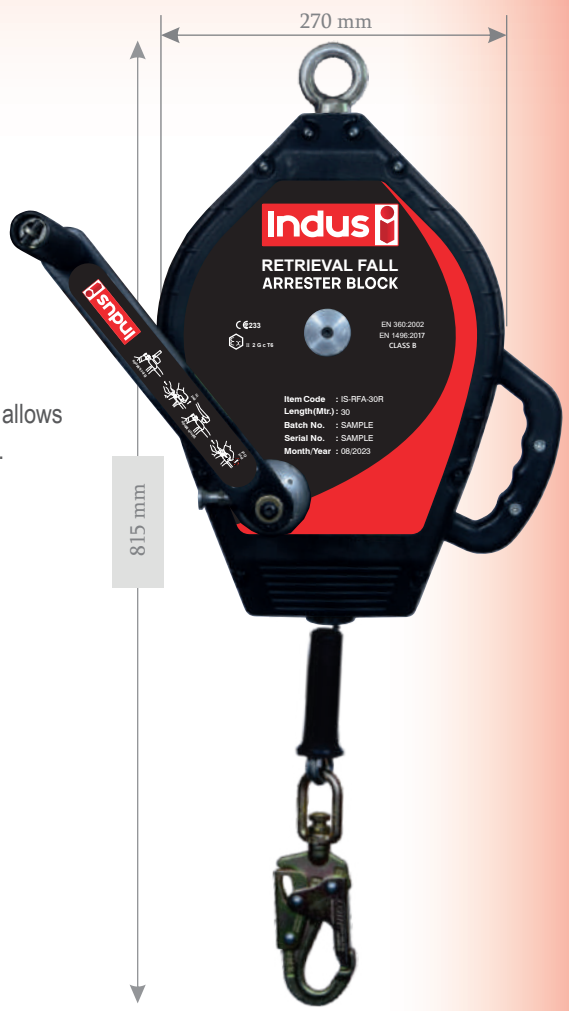

DESIGN

- The locking pin on the side of the casing at the base of the handle allows this dual system to work in independent Fall Arrest & Winch modes.
- Can be easily mounted on the leg of Tripod SF-TP-800 using specialized brackets.
- The Dual mode-helps easy movement of user while working in confined spaces.
- Retractable mode-enables easy mount of user in confined spaces.
- Winch mode - enables easy retrieval.

LENGTH

- 25 mtr. to 30 mtr.

CABLE

- Material: Galvanized steel wire rope 4.8 mm.
- Minimum Breaking Strength: 12 KN

WEIGHT

- SF-RFA-25R:-15.050 kg ± 0.100 kg
- SF-RFA-30R:- 15.300 kg ± 0.100 kg

USER CAPACITY

- User Capacity: 100 kg Max.

RELEVANT STANDARD

- Meets or Exceeds EN 360 : 2002 & EN 1496:2017 CLASS B

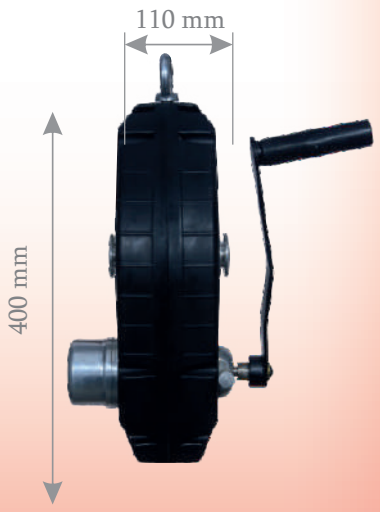

Made in India